


Marine/RV batteries outperform traditional flooded, AGM, and Gel batteries with exceptional dual-purpose, starting, and cycling performance. The batteries are tolerant of a wide ambient temperature range, vibration, and Partial State of Charge operation. These batteries are used for Marine, Caravan, Boat and Truck.



Dimensions

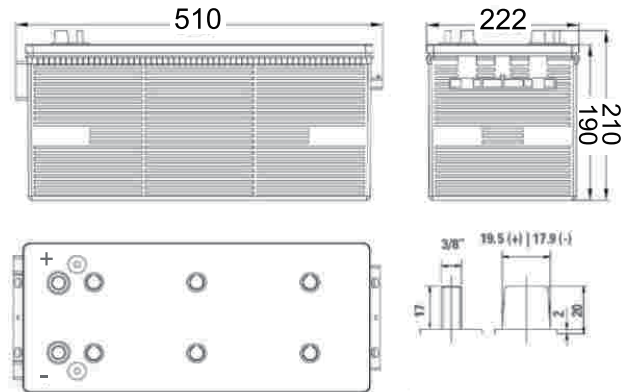

General Features

- Non-spillable construction
- Sealed and Maintenance-free
- Deep cycle technology: can be used as a supply and starter battery
- 3 times cycle life compared to conventional battery
- Wider temperature range for application: -40°C-70°C
- 99.997% purity lead material: low internal resistance and low self-discharge

Compliant Standards

- EN 50342
- GB/T5008.1-2013
- JB/T 12666
- ISO45001, ISO9001 and ISO14001 certified production facilities

Specifications

Nominal Voltage	12V
20Hr Capacity @25°C(77°F)	180Ah
Reserve Capacity (25A)	400min
CCA(EN)	1000A
Weight	50kg
Dimension	510×222×210mm
Operating Temperature	-40°C ~ 70°C
Acceptable Charging Current	45.0A
Charging Voltage @25°C(77°F)	13.6V ~ 14.9V
Self-Discharge @25°C(77°F)	≤3% per month
Case Material	Reinforced PP
Terminal	AT

Factory address: Fukang Industrial Zone, Longnan, Ganzhou, Jiangxi Province, China.
 Shenzhen Office: RM208-210, Building D, Tongju industrial Park, No.4, Longping West Road, Longgang District, Shenzhen.
 TEL: +86-755-28288189

sales@sfbattery.com

www.sfbattery.com