

### HT Series General Battery

Spaceflight HT Series VRLA batteries are designed with AGM technology, high performance plates and technology to give extra power output for common power backup system. HT series batteries are the general purpose with 5-8 years floating design life at 25°C

#### Applications

- Uninterruptible Power Supply (UPS)
- Emergency backup power supply
- Auto control system
- Communication power supply
- Alarm and security system
- Electric Power System (EPS)

#### General Features

- 5-8 years design life(25°C)
- Non-spillable construction
- Sealed and maintenance-free
- High reliability and stability
- High purity raw material: long life and low self-discharge

#### Standards

- Compliance with IEC, BS, JIS and EU standards.
- UL, CE Certified
- ISO45001,ISO9001 and ISO14001 certified production facilities


#### Specifications

Rated Voltage	12V	
Nominal Capacity	18Ah	(C <sub>20</sub> , 10.5V)
Approx Weight	5.05kg±3%(11.13lbs)	
Terminal	F3/F13	
Rated Capacity(25°C)	18 Ah	( 20hr,0.9A,10.5V)
	16.9 Ah	(10hr,1.69A,10.8V)
	15.5 Ah	(5hr,3.1A,10.5V)
	11.5 Ah	(1hr,11.5A,9.6V)
Max.Discharge Current	270A(5s)	
Max.Charge Current	4.5A	
Internal Resistance(25°C)	Approx 20mΩ	
Operating Temp.Range	Discharge	-20~60°C(-4~140°F)
	Charge	-10~50°C(14~122°F)
	Storage	-20~60°C(-4~140°F)
Nominal operating temperature	25±5°C	
Charge Voltage	Cycle Use	Initial Charging Current less than 4.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	Standby Use	Initial Charging Current less than 4.5A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Temperature effects on capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%
Self Discharge(25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	82%
	Capacity after 12 months storage	65%



#### Dimensions

unit:mm

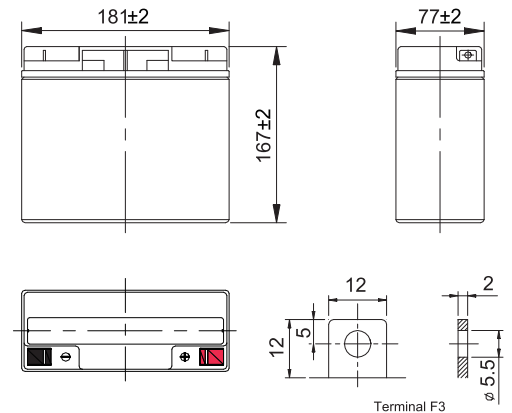

Length	181±2mm (7.13 inches)
Width	77±2mm (3.03 inches)
Container Height	167±2mm (6.57 inches)
Total Height	167±2mm (6.57 inches)

#### Battery Construction

Component	Positive plate	Negative plate	Container	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS(UL94-HB) or FR(UL94-V0)	Rubber	Copper	Fiberglass	Sulfuric acid









#### Constant Current Discharge (Amperes) at 25°C(77°F)

E.V/Time	5min	10min	15min	30min	60min	3h	5h	10h	20h
1.60V	67.45	45.32	34.52	20.33	11.50	4.75	3.23	1.78	0.94
1.65V	65.01	44.26	33.67	19.91	11.33	4.66	3.18	1.76	0.93
1.70V	62.58	43.20	32.82	19.48	11.01	4.55	3.12	1.74	0.92
1.75V	60.14	41.93	31.98	19.06	10.59	4.46	3.10	1.72	0.90
1.80V	57.71	40.81	31.13	18.53	10.27	4.36	3.02	1.69	0.89

#### Constant Power Discharge (Watts/cell) at 25°C(77°F)

E.V/Time	5min	10min	15min	30min	45min	60min	2h	3h	5h
1.60V	137	86.5	68.7	40.2	29.4	23.7	15.4	11.1	6.96
1.65V	132	83.9	67.1	39.0	28.4	22.8	14.4	10.4	6.96
1.70V	127	80.5	64.4	37.7	27.1	21.6	13.6	9.60	6.61
1.75V	120	77.0	61.7	36.3	25.9	20.4	12.7	8.80	6.24
1.80V	113	73.4	59.3	34.8	24.5	19.1	11.5	7.80	5.78

Note: The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum.

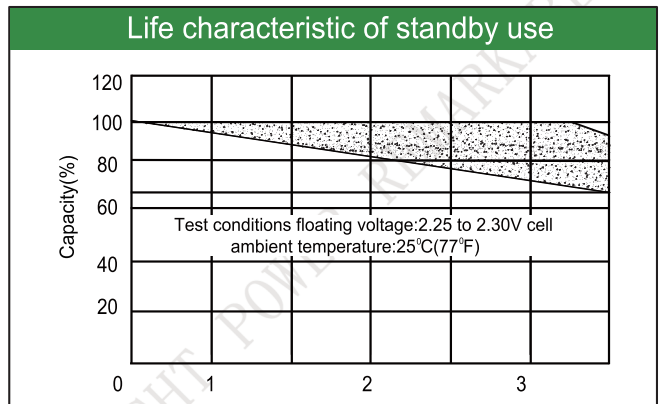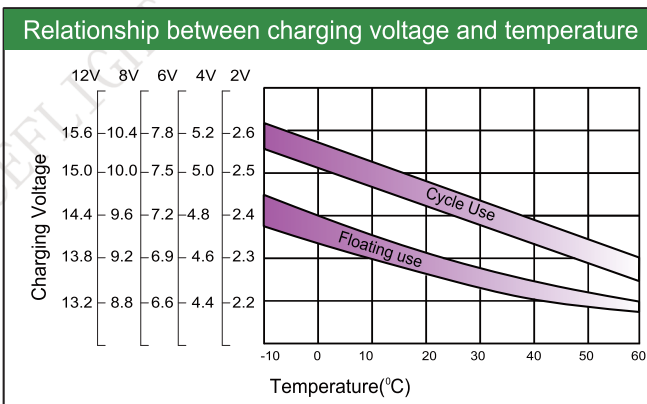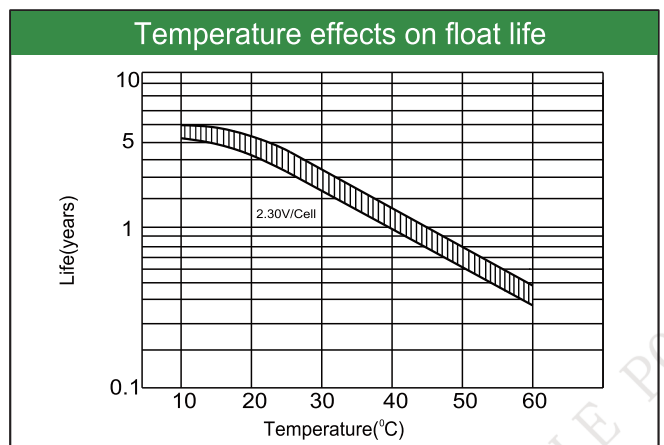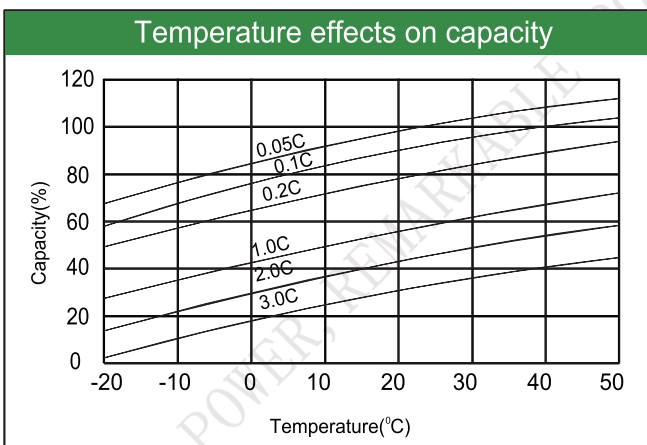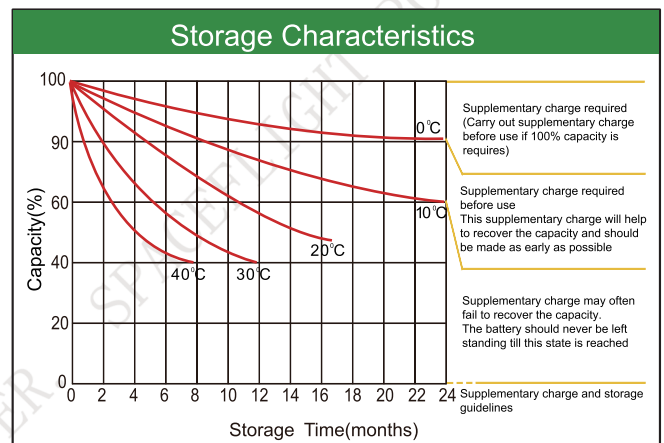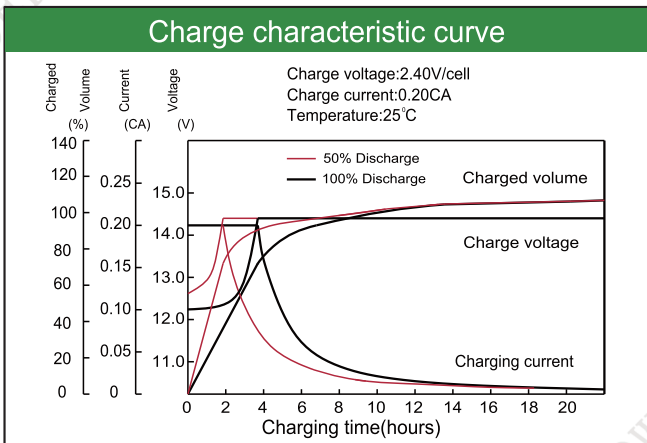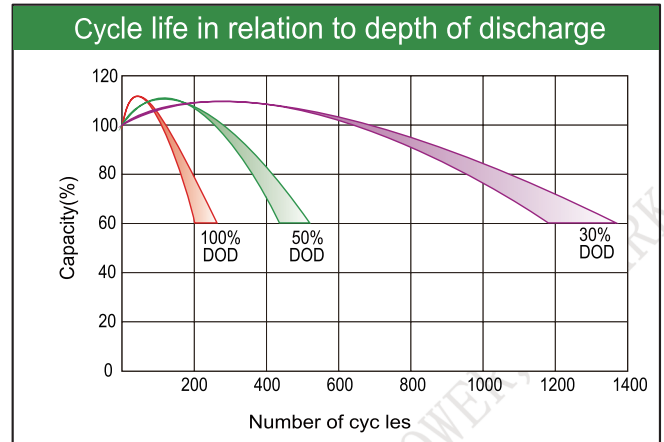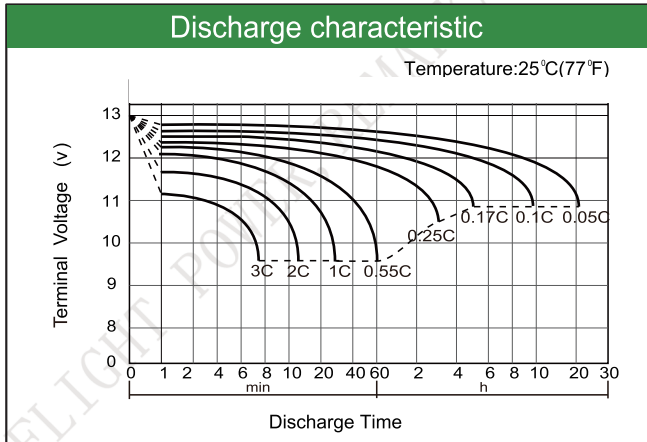

Factory address: Fukang Industrial Zone, Longnan, Ganzhou, Jiangxi Province, China.  
Shenzhen Office: RM208-210, Building D, Tongju industrial Park, No.4, Longping West Road, Longgang District, Shenzhen.  
TEL: +86-755-28288189      [sales@sfbattery.com](mailto:sales@sfbattery.com)      [www.sfbattery.com](http://www.sfbattery.com)