

HT Series General Battery

Spaceflight HT Series VRLA batteries are designed with AGM technology, high performance plates and technology to give extra power output for common power backup system. HT series batteries are the general purpose with 5-8 years floating design life at 25°C

Applications

- Uninterruptible Power Supply (UPS)
- Emergency backup power supply
- Auto control system
- Communication power supply
- Alarm and security system
- Electric Power System (EPS)

General Features

- 10-12 years design life(25°C)
- Non-spillable construction
- Sealed and maintenance-free
- High reliability and stability
- High purity raw material: long life and low self-discharge

Standards

- Compliance with IEC, BS, JIS and EU standards.
- UL, CE Certified
- ISO45001,ISO9001 and ISO14001 certified production facilities


Specifications

Rated Voltage	12V	
Nominal Capacity	90Ah	(C ₁₀ , 10.8V)
Approx Weight	28kg±3%(61.73lbs)	
Terminal	F21	
Rated Capacity(25°C)	96 Ah	(20hr,4.8A,10.5V)
	90 Ah	(10hr,9.0A,10.8V)
	84 Ah	(5hr,16.8A,10.5V)
	62 Ah	(1hr,62A,9.6V)
Max.Discharge Current	900A(5s)	
Max.Charge Current	22.5A	
Internal Resistance(25°C)	Approx 5mΩ	
Operating Temp.Range	Discharge	-20~60°C(-4~140°F)
	Charge	-10~50°C(14~122°F)
	Storage	-20~60°C(-4~140°F)
Nominal operating temperature	25±5°C	
Charge Voltage @25°C(77°F)	Cycle Use	Initial Charging Current less than 22.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	Standby Use	Initial Charging Current less than 22.5A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Temperature effects on capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%
Self Discharge(25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	82%
	Capacity after 12 months storage	65%



Dimensions

unit:mm

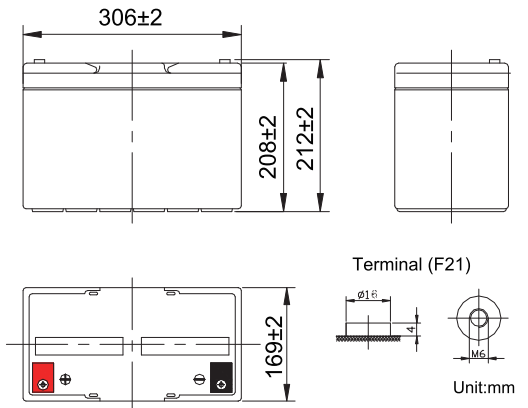

Length	306±2mm (12.1 inches)
Width	169±2mm (6.65 inches)
Container Height	208±2mm (8.19 inches)
Total Height	212±2mm (8.35 inches)

Battery Construction

Component	Positive plate	Negative plate	Container	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS(UL94-HB) or FR(UL94-V0)	Rubber	Copper	Fiberglass	Sulfuric acid









Constant Current Discharge (Amperes) at 25°C(77°F)

E.V/Time	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	/	236	188	104	62.0	27.0	18.0	9.9	4.95
1.65V	/	224	178	101	60.0	26.7	17.8	9.6	4.90
1.70V	/	212	168	98.0	59.0	25.6	17.5	9.5	4.85
1.75V	/	199	157	94.5	57.5	24.8	16.8	9.4	4.80
1.80V	/	185	145	90.5	55.0	24.0	16.0	9.0	4.70

Constant Power Discharge (Watts/cell) at 25°C(77°F)

E.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	/	395	326	200	152.0	119	71.0	53.0	36.0
1.65V	/	381	320	193	147.0	117	70.0	52.0	35.0
1.70V	/	366	304	187	141.5	113	68.0	51.0	34.1
1.75V	/	350	292	178	136.0	110	64.0	48.8	33.0
1.80V	/	333	278	170	130.0	107	63.0	47.0	32.0

Note: The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum.

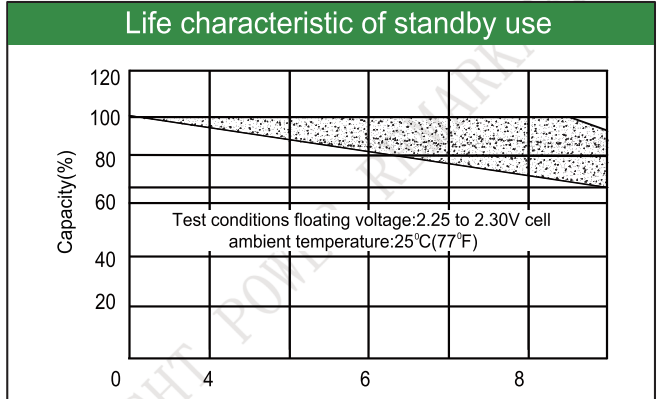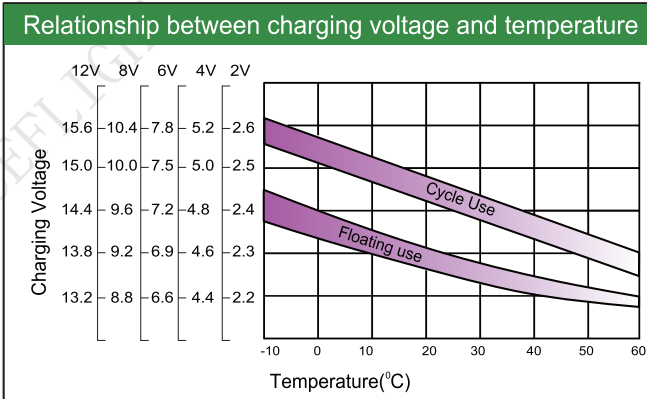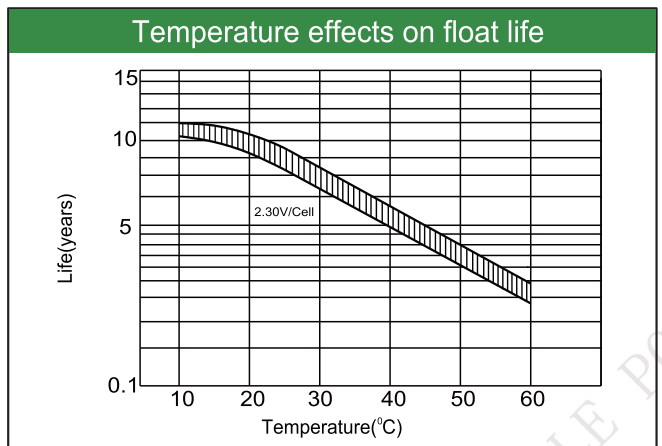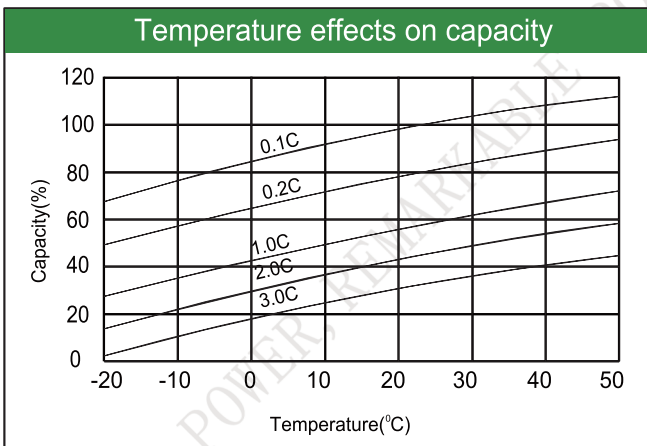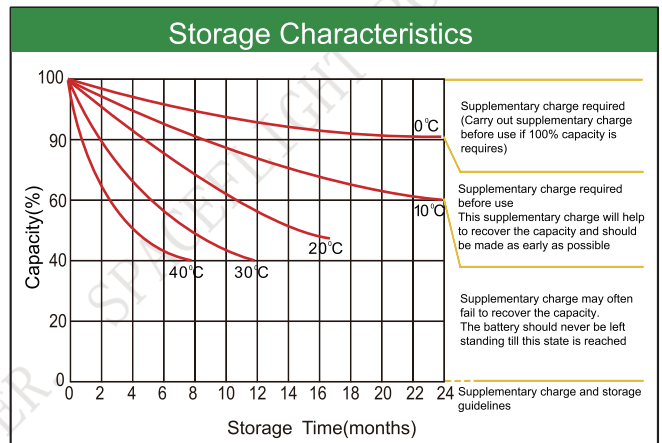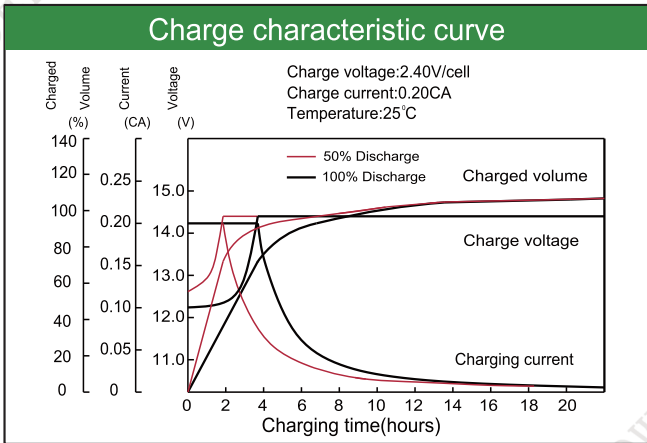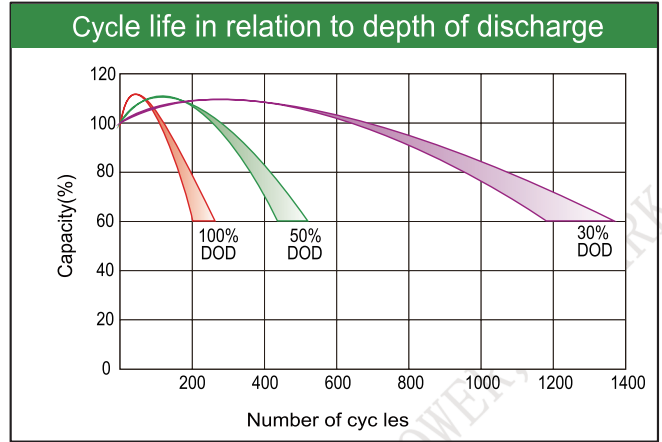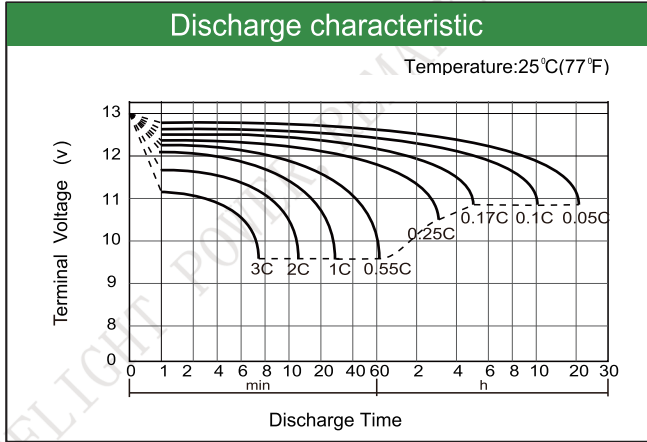

Factory address: Fukang Industrial Zone, Longnan, Ganzhou, Jiangxi Province, China.
 Shenzhen Office: RM208-210, Building D, Tongju industrial Park, No.4, Longping West Road, Longgang District, Shenzhen.
 TEL: +86-755-28288189 sales@sfbattery.com www.sfbattery.com