

HT Series General Battery

Spaceflight HT Series VRLA batteries are designed with AGM technology, high performance plates and technology to give extra power output for common power backup system. HT series batteries are the general purpose with 5-8 years floating design life at 25°C

Applications

- Uninterruptible Power Supply (UPS)
- Emergency backup power supply
- Auto control system
- Communication power supply
- Alarm and security system
- Electric Power System (EPS)

General Features

- 10-12 years design life(25°C)
- Non-spillable construction
- Sealed and maintenance-free
- High reliability and stability
- High purity raw material: long life and low self-discharge

Standards

- Compliance with IEC, BS, JIS and EU standards.
- UL, CE Certified
- ISO45001,ISO9001 and ISO14001 certified production facilities


Specifications

Rated Voltage	12V	
Nominal Capacity	55Ah	(C ₁₀ , 10.8V)
Approx Weight	16.6kg±3%(36.5lbs)	
Terminal	F11	
Rated Capacity(25°C)	59 Ah	(20hr, 2.95A, 10.5V)
	55 Ah	(10hr, 5.5A, 10.8V)
	46.25 Ah	(5hr, 9.25A, 10.5V)
	39.5 Ah	(1hr, 39.5A, 9.6V)
Max.Discharge Current	550A(5s)	
Max.Charge Current	13.8A	
Internal Resistance(25°C)	Approx 7.2mΩ	
Operating Temp.Range	Discharge	-20~60°C (-4~140°F)
	Charge	-10~50°C (14~122°F)
	Storage	-20~60°C (-4~140°F)
Nominal operating temperature	25±5°C	
Charge Voltage @25°C(77°F)	Cycle Use	Initial Charging Current less than 13.8A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	Standby Use	Initial Charging Current less than 13.8A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Temperature effects on capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%
Self Discharge(25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	82%
	Capacity after 12 months storage	65%



Dimensions

unit:mm

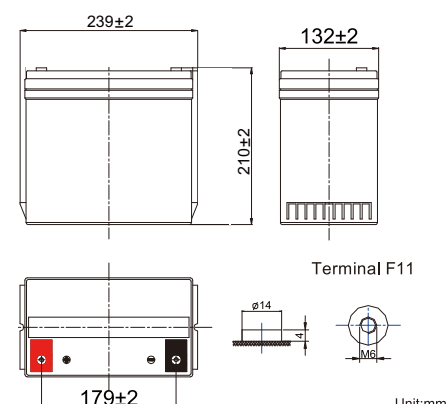

Length	239±2mm (9.41 inches)
Width	132±2mm (5.20 inches)
Container Height	205±2mm (8.07 inches)
Total Height	210±2mm (8.27 inches)

Battery Construction

Component	Positive plate	Negative plate	Container	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS(UL94-HB) or FR(UL94-V0)	Rubber	Copper	Fiberglass	Sulfuric acid

Constant Current Discharge (Amperes) at 25°C(77°F)


E.V/Time	5min	10min	15min	30min	60min	3h	5h	10h	20h
1.60V	/	130	105	67.0	39.5	15.9	10.6	5.90	3.10
1.65V	/	123	100	64.0	37.8	15.2	10.2	5.83	3.05
1.70V	/	115	94.5	60.5	36.0	14.4	9.75	5.75	3.00
1.75V	/	107	88.5	56.7	34.0	13.6	9.25	5.65	2.95
1.80V	/	98.5	81.0	52.7	31.8	12.7	8.70	5.50	2.85

Constant Power Discharge (Watts/cell) at 25°C(77°F)


E.V/Time	5min	10min	15min	30min	45min	60min	2h	3h	5h
1.60V	/	240	195	130	96.0	78.0	42.5	30.5	19.8
1.65V	/	229	185	125.5	92.7	75.4	40.7	29.3	19.2
1.70V	/	216	175	120.5	89.3	72.7	38.8	28.0	18.5
1.75V	/	203	163	115	85.8	69.9	36.9	26.7	17.8
1.80V	/	188	153	109	82.1	66.7	35.0	25.4	17.0

Note: The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum.


Discharge characteristic

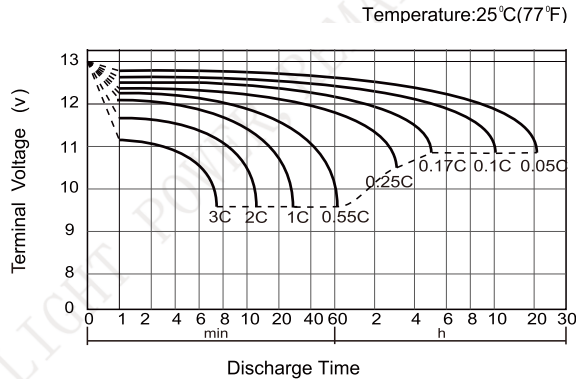


Cycle life in relation to depth of discharge

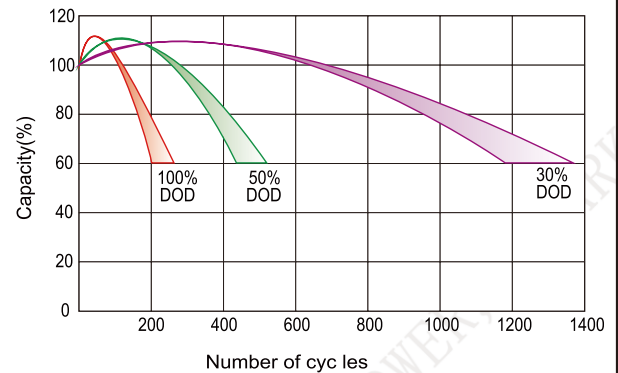


Charge characteristic curve

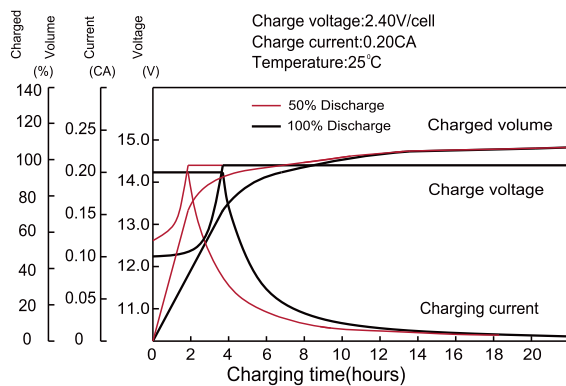


Storage Characteristics

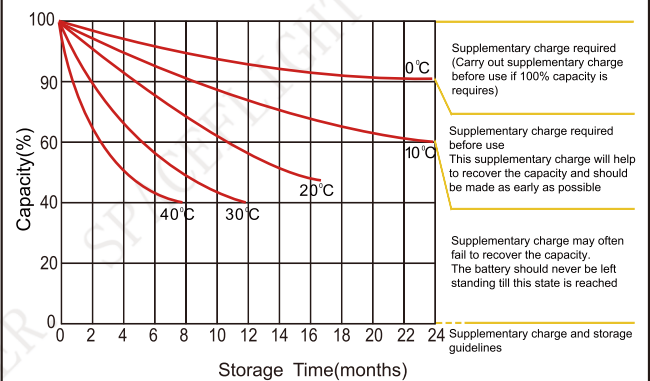


Temperature effects on capacity

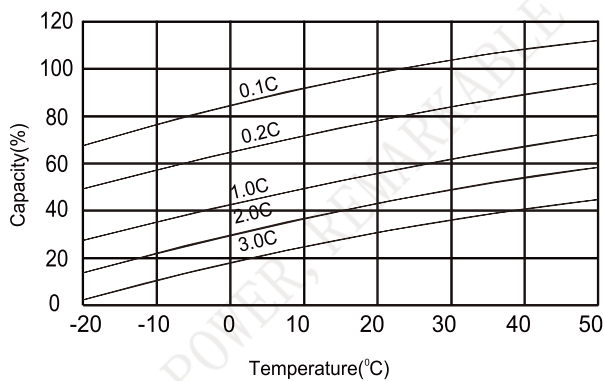


Temperature effects on float life

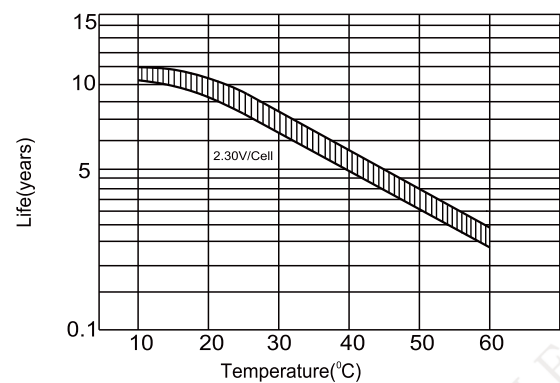

Relationship between charging voltage and temperature

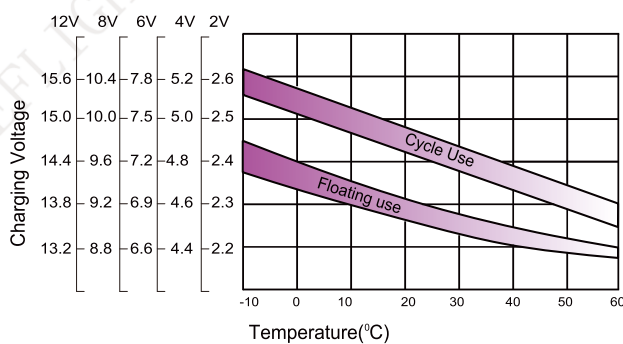

Life characteristic of standby use

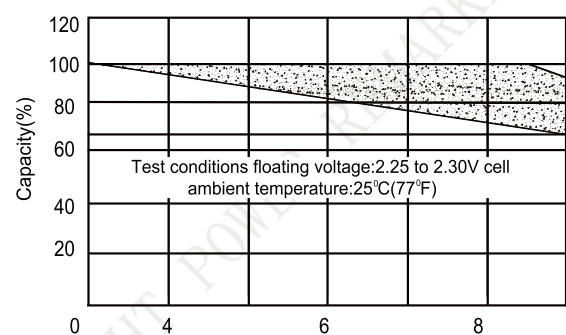

Factory address: Fukang Industrial Zone, Longnan, Ganzhou, Jiangxi Province, China.

Shenzhen Office: RM208-210, Building D, Tongju industrial Park, No.4, Longping West Road, Longgang District, Shenzhen.

TEL: +86-755-28288189

sales@sfbattery.com

www.sfbattery.com